
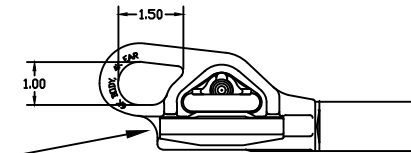


REVISIONS

NO.	DATE	DESCRIPTION	BY	CKD
1	03/20/18	WIRE RANGE WAS 0.19 TO 0.47	MBG	
2	10/31/19	HGSP-51-6F USED TO BE THE STANDARD	MBG	

CATALOG NUMBER	LENGTHS (IN)			STRENGTH (LBS.)	
	L1	L2	ROD DIA.	SECTIONALIZER	PULLING EYE
HGSP-51-6	6	20.75	.75	6,000	4,000

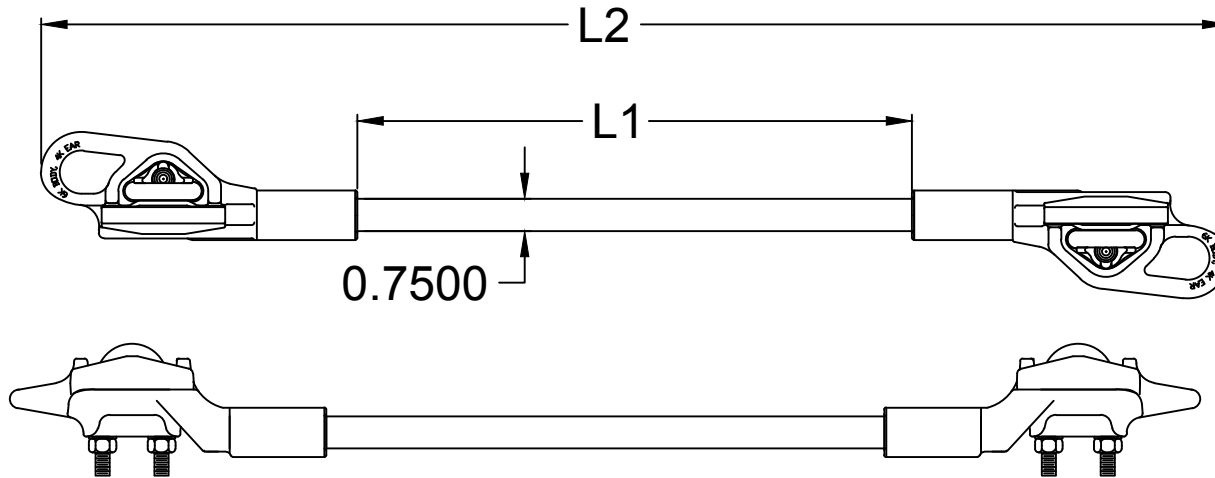


CLAMPING WIRE RANGE:
0.16 - 0.51 INCHES

BASE VIEW

NOTES:

- 1.0 MATERIAL
 - 1.1 END FITTINGS - DUCTILE IRON 654512
 - 1.2 ROD - FIBERGLASS
- 2.0 FINISH
 - 2.1 END FITTINGS - HOT DIP GALVANIZED PER ASTM-A-153
 - 2.2 ROD - ULTRAVIOLET PROTECTIVE COATING, MUNSEL GRAY (OPTIONAL) - VULCANIZED SILICONE RUBBER, GRAY
- 3.0 DIMENSIONS IN INCHES

	MACLEAN POWER SYSTEMS A Maclean-fogg Company
HGSP-51-6 FIBERGLASS SECTIONALIZER	

This information is confidential and is the property of Maclean Power Systems. It may not be made public or reproduced except that the Customer may make copies for use solely in installation, maintenance, and operation of products supplied by Maclean Power Systems.

ENG. REF.

DATE: 01-18-12	SCALE: 1:1	NO.:	CEB-3868	R	DF
CHK: KK	CRD: []	APR: []		2	
BY: []	BY: []	BY: []			