


REVISIONS

| NO. | DATE | DESCRIPTION | BY | CKD |
|-----|----------|------------------|-----|-----|
| 1 | 09/21/17 | ADDED 26" LENGTH | MBG | |

| CATALOG NUMBER | LENGTHS (IN) | | |
|----------------------------|--------------|-------|------|
| | L1 | L2 | D |
| POLYURETHANE COATED SERIES | | | |
| GCS8-13 | 13 | 1.72 | .750 |
| GCS8-19.25 | 19.25 | 9.97 | .750 |
| GCS8-24 | 24 | 12.72 | .750 |
| GCS8-26 | 26 | 14.72 | .750 |
| GCS8-36 | 36 | 24.72 | .750 |
| GCS8-48 | 48 | 36.72 | .750 |
| GCS8-60 | 60 | 48.72 | .750 |
| GCS8-66 | 66 | 54.72 | .750 |
| GCS8-78 | 78 | 66.72 | .750 |
| GCS8-84 | 84 | 72.72 | .750 |
| GCS8-96 | 96 | 84.72 | .750 |

NOTE: 'PEPCO' SUFFIX IS FOR PEPCO PART. EX. GCS8-13PEPCO.

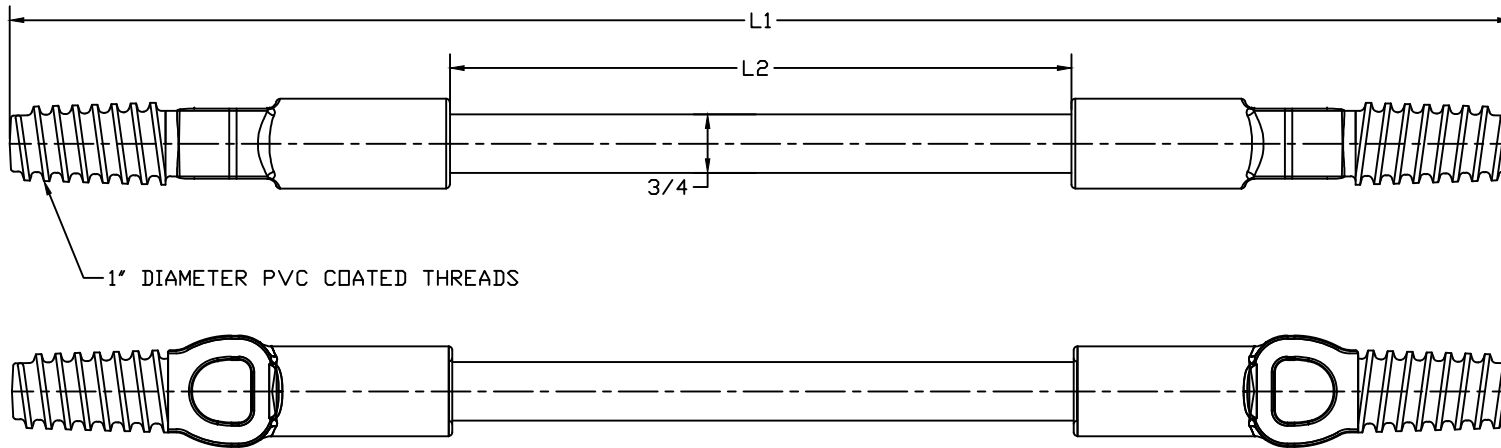

NOTES:

- 1.0 MATERIAL
 - 1.1 END FITTING - DUCTILE IRON 654512
 - 1.2 ROD - FIBERGLASS
- 2.0 FINISH
 - 2.1 END FITTING - HOT DIP GALVANIZED PER ASTM A-153
 - 2.2 ROD - MPS GRAY ULTRAVIOLET PROTECTIVE COATING
- 3.0 OPTIONS
 - 3.1 FOR OTHER LENGTHS, CONTACT FACTORY
- 4.0 DIMENSIONS IN INCHES

ENG. REF.

This information is confidential and is the property of Maclean Power Systems. It may not be made public or reproduced except that the Customer may make copies for use solely in installation, maintenance and operation of products supplied by Maclean Power Systems.

MacLean Power Systems
BIRMINGHAM, ALABAMA

GCS8-"L1" SERIES
CONDUCTOR SPACER

| | | | | | |
|---------------|-------------|----------|----------|-----|-------|
| DATE: 7-05-12 | SCALE: NONE | NO. | CEB-4090 | R/1 | SHL 1 |
| CHK: MYL | CRD: RJC | APP: RJC | | | DF 1 |