



CATALOG NUMBER		LENGTHS (IN)			ULTIMATE MECHANICAL STRENGTHS (LBS)	
POLYURETHANE COATED SERIES	SILICONE RUBBER COATED SERIES	L1	VERTICAL	LONGITUDINAL	TRANSVERSE	
G1MAA312AV1	G1MAA312AV1SC	12	1800	1400	2000	
G1MAA313AV1	G1MAA313AV1SC	13	1700	1250	2000	
G1MAA315AV1	G1MAA315AV1SC	15	1500	1150	2000	
G1MAA318AV1	G1MAA318AV1SC	18	1200	900	2000	
G1MAA321AV1	G1MAA321AV1SC	21	1025	775	2000	
G1MAA324AV1	G1MAA324AV1SC	24	900	700	2000	



END FITTING VIEW - P6523-01

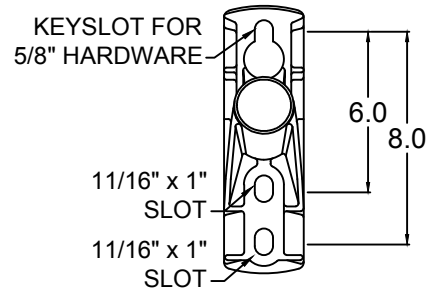

BASE VIEW

NOTES:

- 1.0 MATERIAL
 - 1.1 BASE - ALUMINUM, A356-T6
 - 1.2 END FITTING - ALUMINUM, A356-T6
 - 1.3 ROD - FIBERGLASS
- 2.0 FINISH
 - 2.1 BASE - NONE
 - 2.2 END FITTING - NONE
 - 2.3 ROD - ULTRAVIOLET PROTECTIVE COATING, MUNSSEL GRAY (OPTIONAL) - VULCANIZED SILICONE RUBBER, GRAY
- 3.0 DIMENSIONS IN INCHES

REVISIONS

NO.	DATE	DESCRIPTION	BY	CHK



MACLEAN POWER SYSTEMS
A Maclean-fogg Company

G1MAA3-"L"-AV1 SERIES
SINGLE PHASE DOUBLE POSITION BRACKET

This information is confidential and is the property of Maclean Power Systems. It may not be made public or reproduced except that the Customer may make copies for use solely in installation, maintenance, and operation of products supplied by Maclean Power Systems.

DATE: 4-28-15	SCALE: 1:1	NO. CEB-4197	R 0	SH
DWN: WCL	CHK: BR	APP: BR	DF	

ENG. REF.