




# ACSR ConductRlink™



ACSR ConductRlink™ automatic splices are used on ACSR, AAC, and AAAC conductor.

### Features

- Rated to hold a minimum of 95% of RBS of the strand used
- ANSI C119.4 Full Tension Class A connector
- Factory installed inhibitor
- Color coded strand guide for easy identification

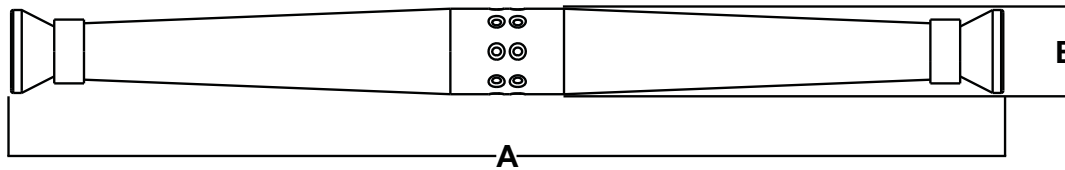

Catalog Number	ACSR ASTM-B232	AAAC ASTM-B399	AAC ASTM-B231	A	B	Strand Color Guide	Conductor Diameter Range
7651	#4	#4	#4	9.12	0.92	Orange	.229-.265
7652AP	#2 & #4	#2 & #4	#2 & #4	11.66	1.01	Red/Orange	.229-.340
7653	1/0	1/0	1/0 & 2/0	14.28	1.20	Yellow	.365-.425
7654AP	1/0 & 2/0	1/0 & 2/0	1/0, 2/0 & 3/0	15.00	1.27	Gray/Yellow	.365-.475
7656AP	3/0 & 4/0	3/0 & 4/0	4/0	16.00	1.56	Pink/Black	.502-.585
7658AP	266.8-18/1 336.4-18/1	266.8 & 336.4	266.8, 366.4 & 397.5	20.00	1.85	Green/Brown	.580-.724
7659	397.1-18/1 477 - 18/1	397.5 & 477	477 & 556.5	21.76	2.06	Aqua	.740-.856
AL55795	-	636	795	18.75	2.19	Orange	.991-1.03

### Notes:

Tension representing a minimum of 15% of the rated breaking strength of the conductor is recommended to assure a permanent low resistance electrical connection