

MPS Catalog Number:

S1 40 80 025 VX SS 015

Date:

09/03/2013

**END FITTINGS**

Tower End Fitting:

Y-Clevis

Line End Fitting:

Ball (ANSI 52-5)

**MATERIAL**

Corona Ring (Tower):

None

Corona Ring (Line):

None

Corona Rings are recommended for applications of 230 kV and above

Number of Sheds:

15 standard

Rod Diameter:

16 mm

Weight Estimate:

9 lbs

4.1 kg

**DIMENSIONAL VALUES**


Section Length (L):	36.2 in	919 mm
Rubber Length (X):	25 in	624 mm
Standard Shed Height (P):	2.1 in	54 mm
Shed Spacing (S):	1.6 in	41 mm
Dry Arc Distance:	28.2 in	716 mm
Leakage Distance:	81.5 in	2,070 mm

**ELECTRICAL VALUES**

60 Hz Dry Flashover:	283 kV	Min. Withstand:	264 kV
60 Hz Wet Flashover:	255 kV	Min. Withstand:	222 kV
Pos. Critical Impulse Flashover:	491 kV	Min. Withstand:	423 kV
Neg. Critical Impulse Flashover:	527 kV	Min. Withstand:	454 kV

**MECHANICAL VALUES**

Specified Mech. Load (SML):	25,000 lbs	111.2 kN
Routine Test Load (RTL):	12,500 lbs	55.6 kN

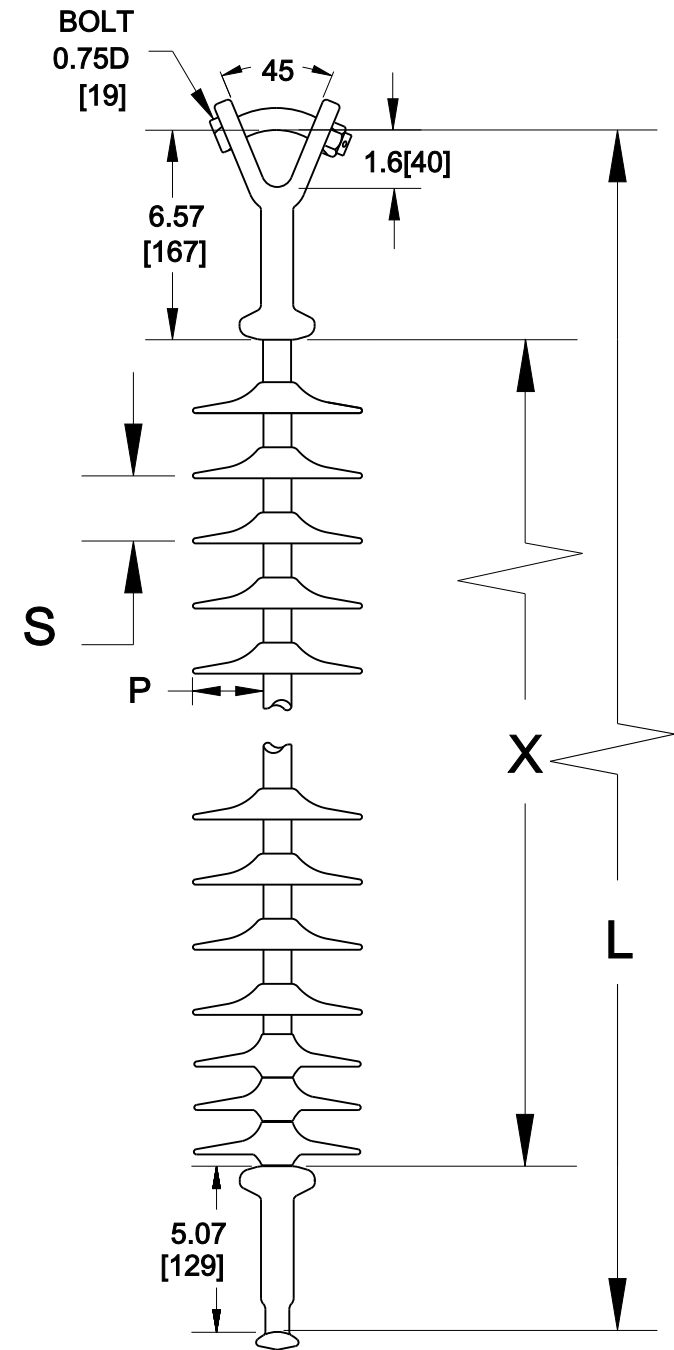

This drawing contains confidential information that is property of MacLean Power L.L.C ('MacLean'). Use of MacLean's confidential information without MacLean's express written consent is strictly prohibited and may expose you to legal liability. If you believe that you received this material in error, please destroy it or return it to 'MacLean Power, L.L.C., 7801 Park Place Rd, York, SC, 29745, USA.'

Dimensions: inches [millimeters]

Note: Drawing not actual depiction of insulator appearance

Silicone Rubber Sheath & Sheds  
Complies with applicable ANSI and IEC standards.