

MPS Catalog Number:
Date:

S1 70 80 025 MX AL 015
01/23/2014

END FITTINGS

Tower End Fitting: Socket (Forged Steel) (ANSI 52-5)
Line End Fitting: Ball (Forged Steel) (ANSI 52-5)

MATERIAL

Corona Ring (Tower): None
Corona Ring (Line): None
Corona Rings are recommended for applications of 230 kV and above
Number of Sheds: 7 large 8 standard
Rod Diameter: 16 mm
Weight Estimate: 7.2 lbs 3.3 kg

DIMENSIONAL VALUES


Section Length (L): 35.1 in 892 mm
Rubber Length (X): 24.5 in 622 mm
Standard Shed Height (P1): 1.5 in 38 mm
Large Shed Height (P2): 2 in 51 mm
Projection Ratio (S/P): - 1.5
Shed Spacing (S): 3 in 76 mm
Dry Arc Distance: 26.8 in 681 mm
Leakage Distance: 66.9 in 1,699 mm

ELECTRICAL VALUES

60 Hz Dry Flashover: 269 kV Min. Withstand: 251 kV
60 Hz Wet Flashover: 243 kV Min. Withstand: 212 kV
Pos. Critical Impulse Flashover: 468 kV Min. Withstand: 403 kV
Neg. Critical Impulse Flashover: 503 kV Min. Withstand: 444 kV

MECHANICAL VALUES

Specified Mech. Load (SML): 25,000 lbs 111.2 kN
Routine Test Load (RTL): 12,500 lbs 55.6 kN

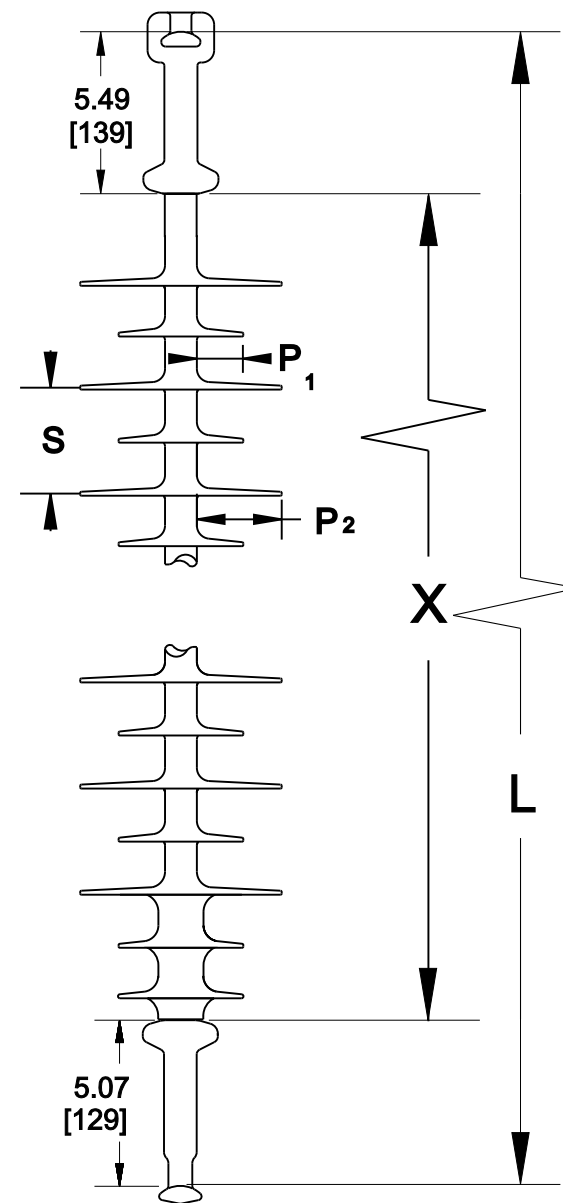

This drawing contains confidential information that is property of MacLean Power L.L.C ('MacLean'). Use of MacLean's confidential information without MacLean's express written consent is strictly prohibited and may expose you to legal liability. If you believe that you received this material in error, please destroy it or return it to 'MacLean Power, L.L.C., 7801 Park Place Rd, York, SC, 29745, USA.'

Dimensions: inches [millimeters]
Note: Drawing not actual depiction of insulator appearance

Silicone Rubber Sheath & Sheds
Complies with applicable ANSI and IEC standards.