



MACLEAN POWER SYSTEMS

Reliable Power Products

11411 Addison, Franklin Park, IL 60131 USA (847) 455-0014

Catalog Number:

S148054MX01

Date:

10/17/2008

END FITTINGS / MATERIAL

Tower End Fitting:

Y-Clevis

Line End Fitting:

Ball (ANSI 52-5)

Corona Ring (tower):

none

Corona Ring (line):

none

Number of Sheds:

27

Weight Estimate:

13.6 Lbs

6.2 kg

DIMENSIONAL VALUES

Section Length (A):

54.3 In 1,379 mm

Shed Diameter (B):

3.7 In 94 mm

Shed Spacing (C):

1.57 In 40 mm

Dry Arc Distance:

46.1 In 1,171 mm

Leakage Distance:

109.2 In 2,773 mm

ELECTRICAL VALUES

60 Hz Dry F.O.(Min. Withstand):

453 kV (419 kV)

60 Hz Wet F.O.(Min. Withstand):

406 kV (353 kV)

CIFO + (Min. Withstand):

778 kV (675 kV)

CIFO - (Min. Withstand):

825 kV (722 kV)


MECHANICAL VALUES

Specified Mech. Load (SML):

25,000 Lbs 111.2 kN

Routine Test Load (RTL):

12,500 Lbs 55.6 kN

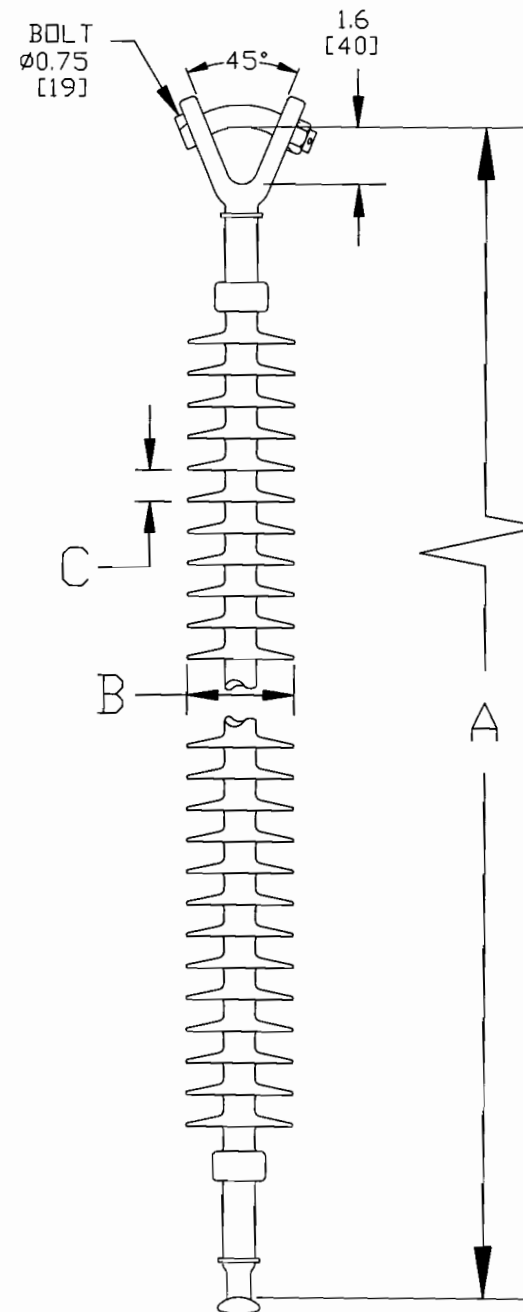

Approved	S148054MX01	JBB
<i>J. Bonlanadi</i>		

This drawing contains confidential information that is the property of MacLean Power L.L.C ("MacLean"). Use of MacLean's confidential information without MacLean's express written consent is strictly prohibited and may expose you to legal liability. If you believe that you received this material in error, please destroy it or return it to "MacLean Power, L.L.C., 11411 Addison, Franklin Park, IL 60131, USA."

Silicone Rubber Sheath & Sheds
Complies with applicable ANSI and IEC standards.