

MPS Catalog Number:
Date:

S2 40 80 049 VA SS 015
02/24/2014

END FITTINGS

Tower End Fitting: Y-Clevis
Line End Fitting: Ball (ANSI 52-8/11)

MATERIAL

Corona Ring (Tower): None
Corona Ring (Line): 8" Corona Ring
Corona Rings are recommended for applications of 230 kV and above
Number of Sheds: 15 standard
Rod Diameter: 24 mm
Weight Estimate: 17.3 lbs 7.8 kg

DIMENSIONAL VALUES


Section Length (L): 63.6 in 1,615 mm
Rubber Length (X): 49 in 1,245 mm
Standard Shed Height (P): 2.1 in 54 mm
Shed Spacing (S): 3.82 in 97 mm
Dry Arc Distance: 49.2 in 1,250 mm
Leakage Distance: 105.9 in 2,690 mm

ELECTRICAL VALUES

60 Hz Dry Flashover: 483 kV Min. Withstand: 446 kV
60 Hz Wet Flashover: 431 kV Min. Withstand: 375 kV
Pos. Critical Impulse Flashover: 826 kV Min. Withstand: 718 kV
Neg. Critical Impulse Flashover: 874 kV Min. Withstand: 749 kV

MECHANICAL VALUES

Specified Mech. Load (SML): 50,000 lbs 222.4 kN
Routine Test Load (RTL): 25,000 lbs 111.2 kN

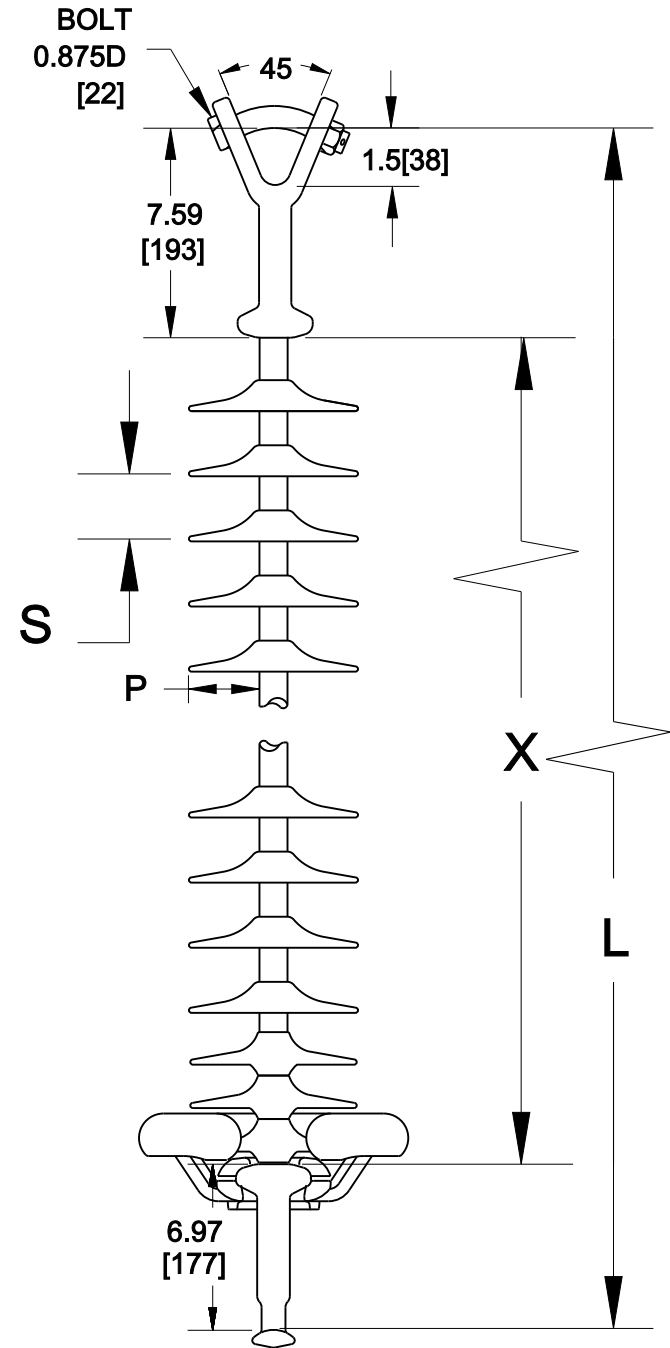

This drawing contains confidential information that is property of MacLean Power L.L.C ('MacLean'). Use of MacLean's confidential information without MacLean's express written consent is strictly prohibited and may expose you to legal liability. If you believe that you received this material in error, please destroy it or return it to 'MacLean Power, L.L.C., 7801 Park Place Rd, York, SC, 29745, USA.'

Dimensions: inches [millimeters]
Note: Drawing not actual depiction of insulator appearance

Silicone Rubber Sheath & Sheds
Complies with applicable ANSI and IEC standards.