

MPS Catalog Number:

S2 40 80 073 VX SS 030

Date:

02/20/2014

END FITTINGS

Tower End Fitting:

Y-Clevis

Line End Fitting:

Ball (ANSI 52-8/11)

MATERIAL

Corona Ring (Tower):

None

Corona Ring (Line):

None

Corona Rings are recommended for applications of 230 kV and above

Number of Sheds:

30 standard

Rod Diameter:

24 mm

Weight Estimate:

21.5 lbs

9.8 kg

DIMENSIONAL VALUES

Section Length (L):

87.6 in 2,225 mm

Rubber Length (X):

73 in 1,854 mm

Standard Shed Height (P):

2.1 in 54 mm

Shed Spacing (S):

2.54 in 65 mm

Dry Arc Distance:

76.7 in 1,948 mm

Leakage Distance:

188.1 in 4,778 mm

ELECTRICAL VALUES

60 Hz Dry Flashover:

745 kV Min. Withstand: 675 kV

60 Hz Wet Flashover:

641 kV Min. Withstand: 558 kV

Pos. Critical Impulse Flashover:

1,243 kV Min. Withstand: 1,105 kV

Neg. Critical Impulse Flashover:

1,302 kV Min. Withstand: 1,134 kV


MECHANICAL VALUES

Specified Mech. Load (SML):

50,000 lbs 222.4 kN

Routine Test Load (RTL):

25,000 lbs 111.2 kN

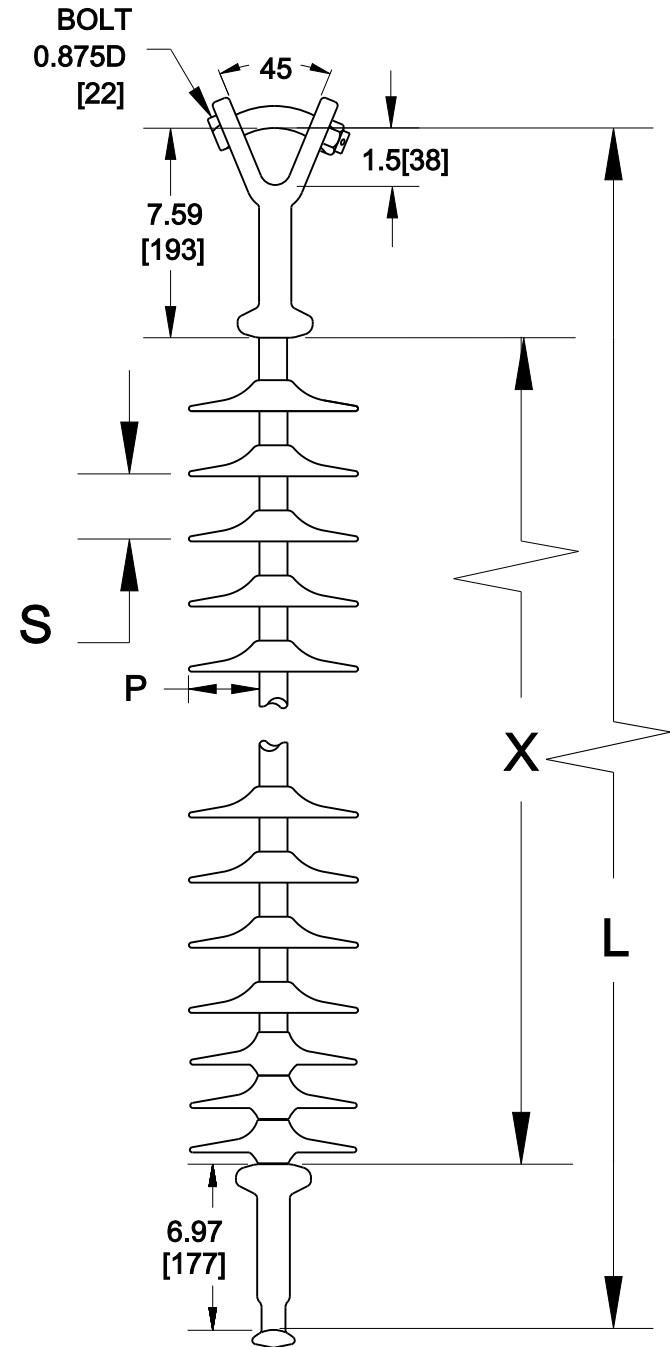

This drawing contains confidential information that is property of MacLean Power L.L.C ('MacLean'). Use of MacLean's confidential information without MacLean's express written consent is strictly prohibited and may expose you to legal liability. If you believe that you received this material in error, please destroy it or return it to 'MacLean Power, L.L.C., 7801 Park Place Rd, York, SC, 29745, USA.'

Dimensions: inches [millimeters]

Note: Drawing not actual depiction of insulator appearance

Silicone Rubber Sheath & Sheds
Complies with applicable ANSI and IEC standards.