

MPS Catalog Number:

S5 40 80 062 VX SS 031

Date:

09/05/2013

**END FITTINGS**

Tower End Fitting:

Y-Clevis

Line End Fitting:

Ball (ANSI 52-5)

**MATERIAL**

Corona Ring (Tower):

None

Corona Ring (Line):

None

Corona Rings are recommended for applications of 230 kV and above

Number of Sheds:

31 standard

Rod Diameter:

16 mm

Weight Estimate:

19.5 lbs

8.8 kg

**DIMENSIONAL VALUES**


Section Length (L):	73.2 in	1,859 mm
Rubber Length (X):	62 in	1,564 mm
Standard Shed Height (P):	2.1 in	54 mm
Shed Spacing (S):	2.02 in	51 mm
Dry Arc Distance:	65.2 in	1,656 mm
Leakage Distance:	180.6 in	4,587 mm

**ELECTRICAL VALUES**

60 Hz Dry Flashover:	635 kV	Min. Withstand:	581 kV
60 Hz Wet Flashover:	556 kV	Min. Withstand:	484 kV
Pos. Critical Impulse Flashover:	1,071 kV	Min. Withstand:	943 kV
Neg. Critical Impulse Flashover:	1,126 kV	Min. Withstand:	973 kV

**MECHANICAL VALUES**

Specified Mech. Load (SML):	30,000 lbs	133.4 kN
Routine Test Load (RTL):	15,000 lbs	66.7 kN

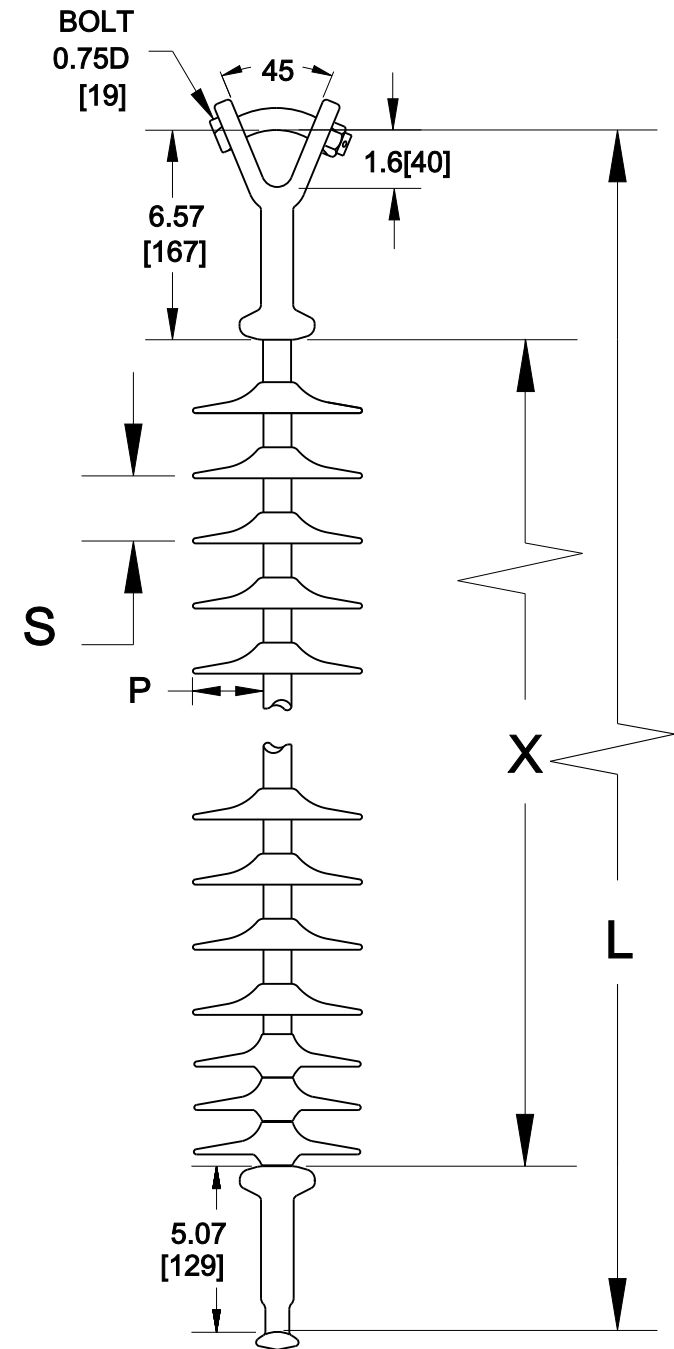

This drawing contains confidential information that is property of MacLean Power L.L.C ('MacLean'). Use of MacLean's confidential information without MacLean's express written consent is strictly prohibited and may expose you to legal liability. If you believe that you received this material in error, please destroy it or return it to 'MacLean Power, L.L.C., 7801 Park Place Rd, York, SC, 29745, USA.'

Dimensions: inches [millimeters]

Note: Drawing not actual depiction of insulator appearance

Silicone Rubber Sheath & Sheds  
Complies with applicable ANSI and IEC standards.