

MPS Catalog Number:

S5 40 80 072 VA SS 020

Date:

09/05/2013

END FITTINGS

Tower End Fitting:

Y-Clevis

Line End Fitting:

Ball (ANSI 52-5)

MATERIAL

Corona Ring (Tower):

None

Corona Ring (Line):

8" Corona Ring

Corona Rings are recommended for applications of 230 kV and above

Number of Sheds:

20 standard

Rod Diameter:

16 mm

Weight Estimate:

14.3 lbs

6.5 kg

DIMENSIONAL VALUES

Section Length (L):

83.2 in

2,113 mm

Rubber Length (X):

72 in

1,818 mm

Standard Shed Height (P):

2.1 in

54 mm

Shed Spacing (S):

4.04 in

103 mm

Dry Arc Distance:

71.7 in

1,821 mm

Leakage Distance:

147.9 in

3,757 mm

ELECTRICAL VALUES

60 Hz Dry Flashover:

697 kV

Min. Withstand:

634 kV

60 Hz Wet Flashover:

605 kV

Min. Withstand:

526 kV

Pos. Critical Impulse Flashover:

1,169 kV

Min. Withstand:

1,035 kV

Neg. Critical Impulse Flashover:

1,226 kV

Min. Withstand:

1,064 kV

MECHANICAL VALUES

Specified Mech. Load (SML):


30,000 lbs

133.4 kN

Routine Test Load (RTL):

15,000 lbs

66.7 kN

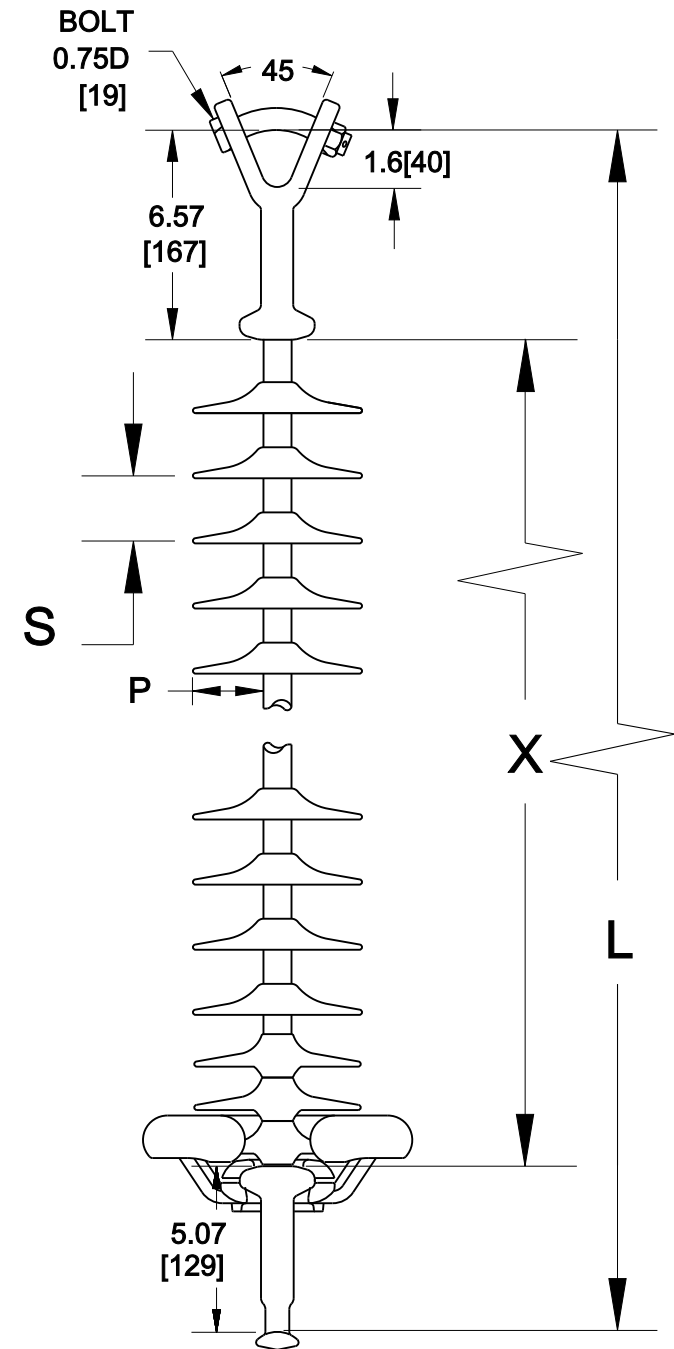

This drawing contains confidential information that is property of MacLean Power L.L.C ('MacLean'). Use of MacLean's confidential information without MacLean's express written consent is strictly prohibited and may expose you to legal liability. If you believe that you received this material in error, please destroy it or return it to 'MacLean Power, L.L.C., 7801 Park Place Rd, York, SC, 29745, USA.'

Dimensions: inches [millimeters]

Note: Drawing not actual depiction of insulator appearance

Silicone Rubber Sheath & Sheds
Complies with applicable ANSI and IEC standards.