

MPS Catalog Number:

S6 40 82 037 VX SS 023

Date:

02/27/2014

**END FITTINGS**

Tower End Fitting:

Y-Clevis

Line End Fitting:

Ball (ANSI 52-8)

**MATERIAL**

Corona Ring (Tower):

None

Corona Ring (Line):

None

Corona Rings are recommended for applications of 230 kV and above

Number of Sheds:

23 standard

Rod Diameter:

18 mm

Weight Estimate:

12.6 lbs

5.7 kg

**DIMENSIONAL VALUES**

Section Length (L):

50.4 in

1,280 mm

Rubber Length (X):

37 in

940 mm

Standard Shed Height (P):

2.2 in

55 mm

Shed Spacing (S):

1.58 in

40 mm

Dry Arc Distance:

40.7 in

1,034 mm

Leakage Distance:

125 in

3,175 mm

**ELECTRICAL VALUES**

60 Hz Dry Flashover:

402 kV

Min. Withstand:

373 kV

60 Hz Wet Flashover:

362 kV

Min. Withstand:

315 kV

Pos. Critical Impulse Flashover:

693 kV

Min. Withstand:

599 kV

Neg. Critical Impulse Flashover:

736 kV

Min. Withstand:

629 kV

**MECHANICAL VALUES**

Specified Mech. Load (SML):


36,000 lbs

160.1 kN

Routine Test Load (RTL):

18,000 lbs

80.1 kN

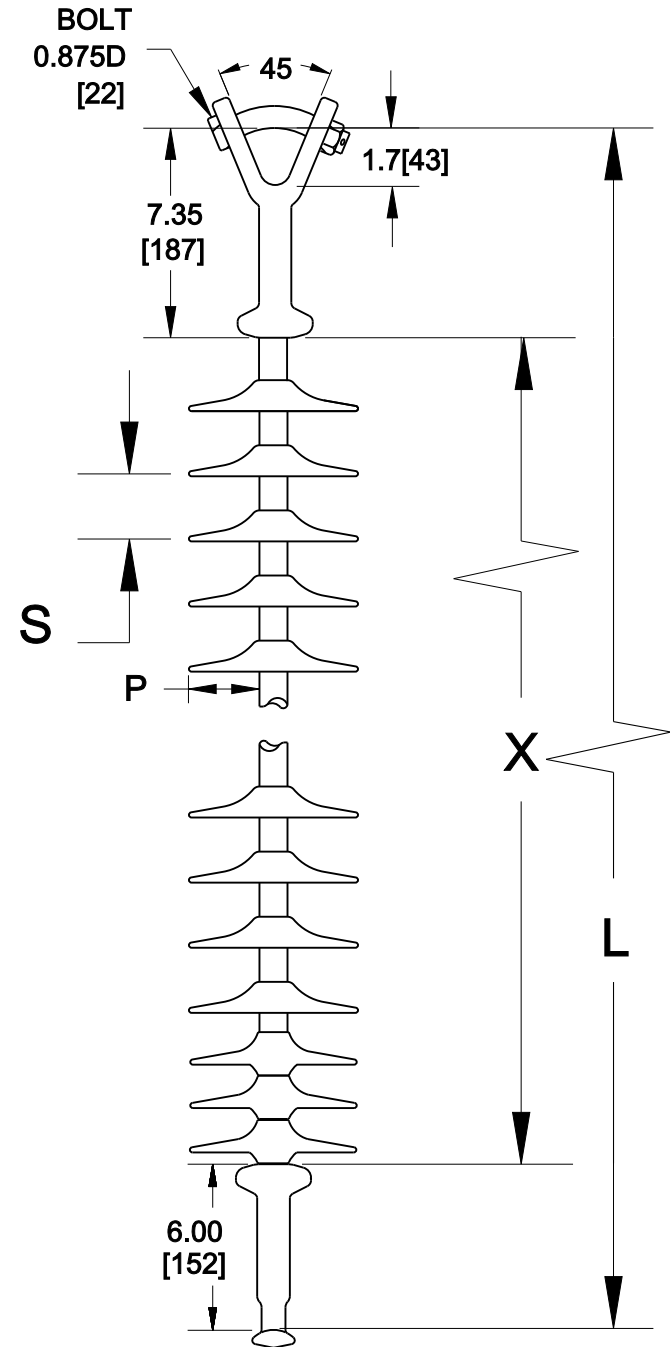

This drawing contains confidential information that is property of MacLean Power L.L.C ('MacLean'). Use of MacLean's confidential information without MacLean's express written consent is strictly prohibited and may expose you to legal liability. If you believe that you received this material in error, please destroy it or return it to 'MacLean Power, L.L.C., 7801 Park Place Rd, York, SC, 29745, USA.'

Dimensions: inches [millimeters]

Note: Drawing not actual depiction of insulator appearance

Silicone Rubber Sheath & Sheds  
Complies with applicable ANSI and IEC standards.