

MPS Catalog Number:

S6 40 82 058 VX SS 017

Date:

02/27/2014

END FITTINGS

Tower End Fitting:

Y-Clevis

Line End Fitting:

Ball (ANSI 52-8)

MATERIAL

Corona Ring (Tower):

None

Corona Ring (Line):

None

Corona Rings are recommended for applications of 230 kV and above

Number of Sheds:

17 standard

Rod Diameter:

18 mm

Weight Estimate:

16.8 lbs

7.6 kg

DIMENSIONAL VALUES

Section Length (L):

71.4 in

1,814 mm

Rubber Length (X):

58 in

1,473 mm

Standard Shed Height (P):

2.2 in

55 mm

Shed Spacing (S):

3.92 in

100 mm

Dry Arc Distance:

61.7 in

1,567 mm

Leakage Distance:

122.7 in

3,117 mm

ELECTRICAL VALUES

60 Hz Dry Flashover:

602 kV

Min. Withstand:

551 kV

60 Hz Wet Flashover:

529 kV

Min. Withstand:

461 kV

Pos. Critical Impulse Flashover:

1,018 kV

Min. Withstand:

894 kV

Neg. Critical Impulse Flashover:

1,072 kV

Min. Withstand:

924 kV

MECHANICAL VALUES

Specified Mech. Load (SML):


36,000 lbs

160.1 kN

Routine Test Load (RTL):

18,000 lbs

80.1 kN

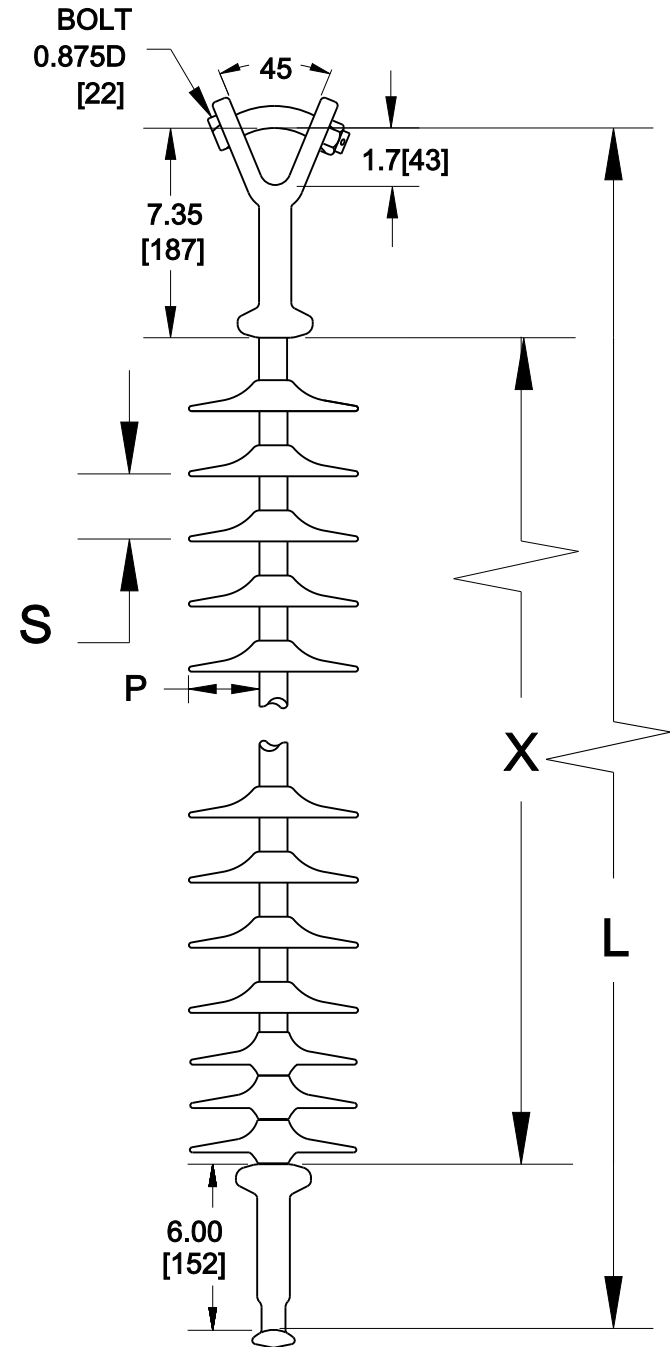

This drawing contains confidential information that is property of MacLean Power L.L.C ('MacLean'). Use of MacLean's confidential information without MacLean's express written consent is strictly prohibited and may expose you to legal liability. If you believe that you received this material in error, please destroy it or return it to 'MacLean Power, L.L.C., 7801 Park Place Rd, York, SC, 29745, USA.'

Dimensions: inches [millimeters]

Note: Drawing not actual depiction of insulator appearance

Silicone Rubber Sheath & Sheds
Complies with applicable ANSI and IEC standards.