

MPS Catalog Number:
Date:

S6 40 82 064 VX SS 017
02/27/2014

END FITTINGS

Tower End Fitting: Y-Clevis
Line End Fitting: Ball (ANSI 52-8)

MATERIAL

Corona Ring (Tower): None
Corona Ring (Line): None
Corona Rings are recommended for applications of 230 kV and above
Number of Sheds: 17 standard
Rod Diameter: 18 mm
Weight Estimate: 17.1 lbs 7.8 kg

DIMENSIONAL VALUES


Section Length (L): 77.4 in 1,966 mm
Rubber Length (X): 64 in 1,626 mm
Standard Shed Height (P): 2.2 in 55 mm
Shed Spacing (S): 4.39 in 112 mm
Dry Arc Distance: 67.7 in 1,720 mm
Leakage Distance: 128.7 in 3,269 mm

ELECTRICAL VALUES

60 Hz Dry Flashover: 659 kV Min. Withstand: 601 kV
60 Hz Wet Flashover: 575 kV Min. Withstand: 500 kV
Pos. Critical Impulse Flashover: 1,109 kV Min. Withstand: 979 kV
Neg. Critical Impulse Flashover: 1,165 kV Min. Withstand: 1,008 kV

MECHANICAL VALUES

Specified Mech. Load (SML): 36,000 lbs 160.1 kN
Routine Test Load (RTL): 18,000 lbs 80.1 kN

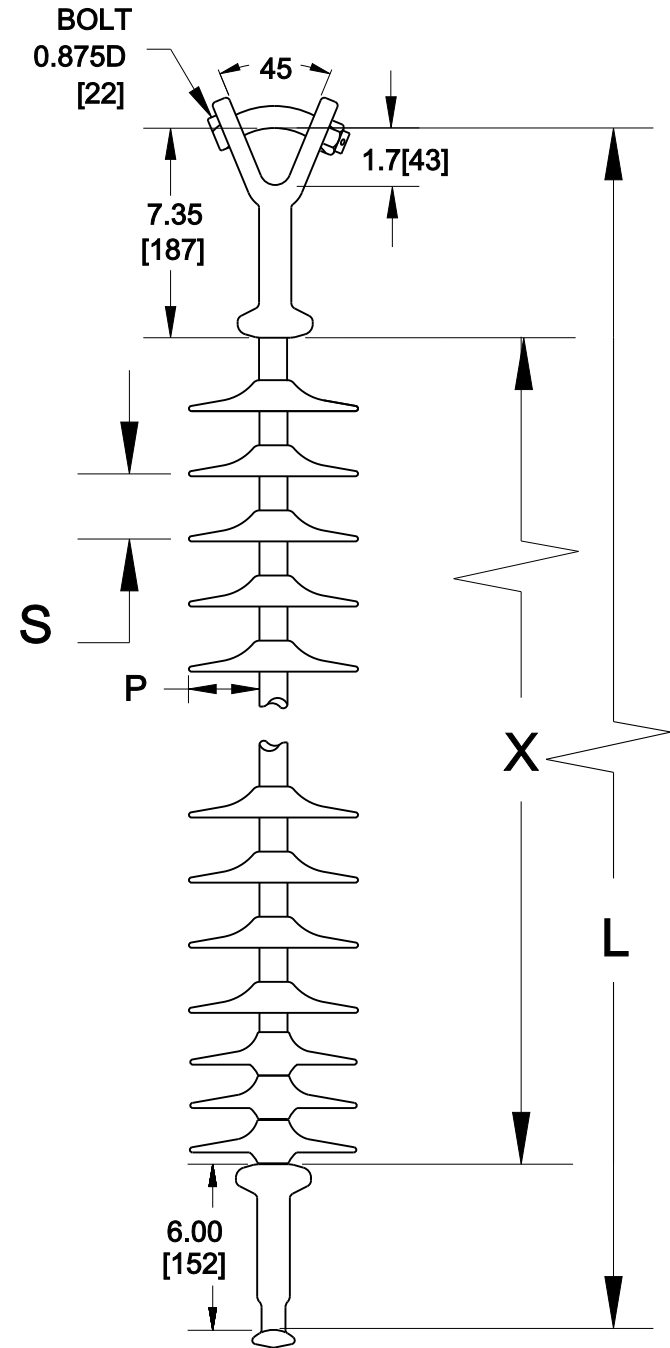

This drawing contains confidential information that is property of MacLean Power L.L.C ('MacLean'). Use of MacLean's confidential information without MacLean's express written consent is strictly prohibited and may expose you to legal liability. If you believe that you received this material in error, please destroy it or return it to 'MacLean Power, L.L.C., 7801 Park Place Rd, York, SC, 29745, USA.'

Dimensions: inches [millimeters]
Note: Drawing not actual depiction of insulator appearance

Silicone Rubber Sheath & Sheds
Complies with applicable ANSI and IEC standards.