

## Universal Style Bands

MPS universal wrap-around type pole bands are ideal for deadending, guying and spare arm suspension assemblies.


### Features

- Installs in minutes
- Assembled with one 3/4" curved bolt and one J6277 cone head bolt


### Material

Steel hot dip galvanized

Catalog Number	Pole Diameter Range (in)	Steel Size	Weight (lbs)
J6270	8 - 14	4 x 3/16	14.0
J6280	6 - 10	4 x 3/16	11.0



J6277



J6157

## Universal Band Accessories




Cone head bolts are used to attach fittings to universal bands. Installed from the inside of the band, the square shoulder fits into the rectangular band slots and the special head digs into the pole to counteract band slippage.

The J6157 clevis is designed to surround the 4" wide section of a universal pole band, developing great strength for deadending. The deadend clevis is furnished complete with a 3/4" bolt, square nut, concave locknut and a selflocking cotter pin.

### Material

Steel hot dip galvanized

Catalog Number	Description	Steel Size (in)	Weight /100 (lbs)
J6157	Deadend Clevis	2 1/2 x 3/16	272
J6277	Cone Head Bolt	3/4 x 2 1/2	50

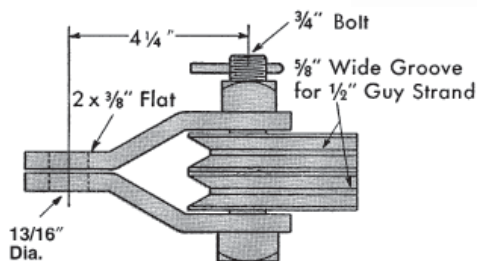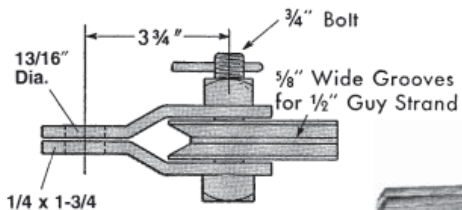

## Guy Attachment Assembly

Catalog Number	Type	Weight /100 (lbs)
J6273	Single	320
J6274	Double	607