

MPS Catalog Number:

S2 40 80 016 VX SS 009

Date:

02/20/2014

**END FITTINGS**

Tower End Fitting:

Y-Clevis

Line End Fitting:

Ball (ANSI 52-8/11)

**MATERIAL**

Corona Ring (Tower):

None

Corona Ring (Line):

None

Corona Rings are recommended for applications of 230 kV and above

Number of Sheds:

9 standard

Rod Diameter:

24 mm

Weight Estimate:

15.2 lbs

6.9 kg

**DIMENSIONAL VALUES**

Section Length (L):

30.6 in

777 mm

Rubber Length (X):

16 in

406 mm

Standard Shed Height (P):

2.1 in

54 mm

Shed Spacing (S):

1.8 in

46 mm

Dry Arc Distance:

19.7 in

500 mm

Leakage Distance:

49.7 in

1,262 mm

**ELECTRICAL VALUES**

60 Hz Dry Flashover:

202 kV

Min. Withstand:

188 kV

60 Hz Wet Flashover:

180 kV

Min. Withstand:

157 kV

Pos. Critical Impulse Flashover:

350 kV

Min. Withstand:

303 kV

Neg. Critical Impulse Flashover:

379 kV

Min. Withstand:

335 kV

**MECHANICAL VALUES**

Specified Mech. Load (SML):


50,000 lbs

222.4 kN

Routine Test Load (RTL):

25,000 lbs

111.2 kN

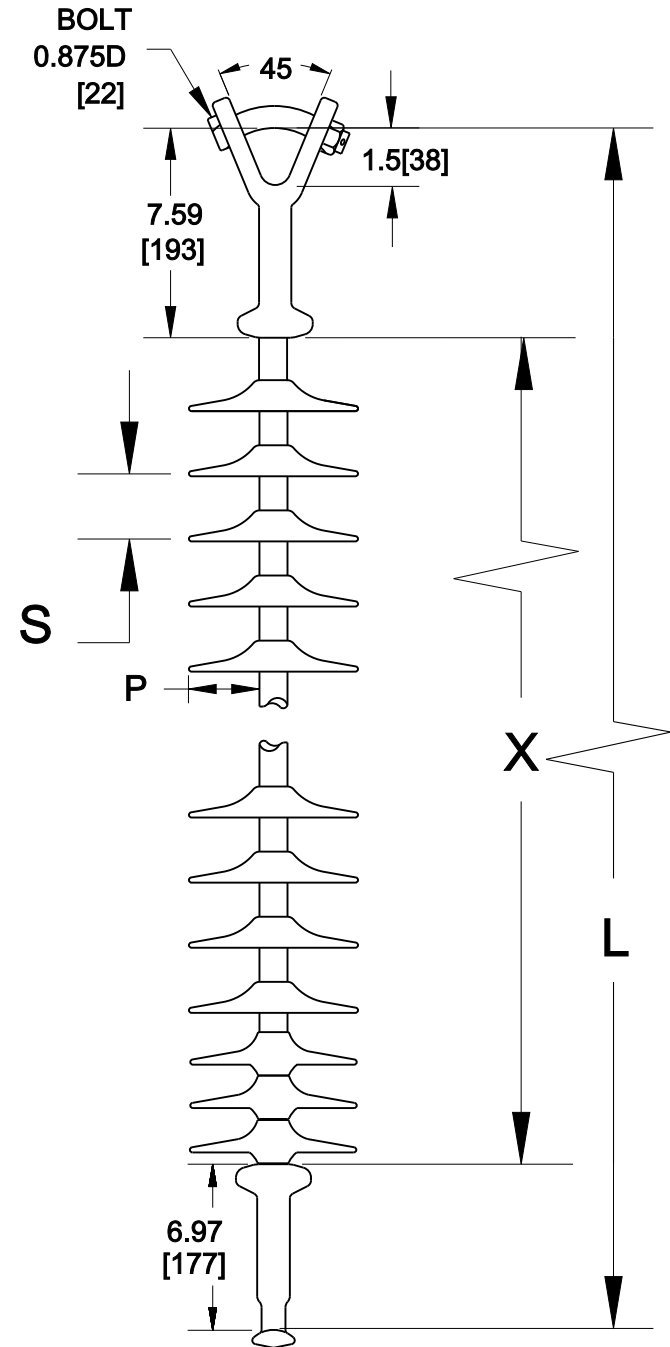

This drawing contains confidential information that is property of MacLean Power L.L.C ('MacLean'). Use of MacLean's confidential information without MacLean's express written consent is strictly prohibited and may expose you to legal liability. If you believe that you received this material in error, please destroy it or return it to 'MacLean Power, L.L.C., 7801 Park Place Rd, York, SC, 29745, USA.'

Dimensions: inches [millimeters]

Note: Drawing not actual depiction of insulator appearance

Silicone Rubber Sheath & Sheds  
Complies with applicable ANSI and IEC standards.